

SONEIL

6033 Shawson Dr., Unit 29, Mississauga
Ontario, Canada L5T 1H8, Email: info@soneil.com
Ph.: 905 565 0360 Fax: 905 565 0352
Visit us on the web at <http://soneil.com>



SPECIFICATIONS - 1214SR-IP55 CHARGER

Totally Automatic Switch-Mode Battery Chargers

"Suitable for Gel, Sealed & Wet Lead Acid Batteries"

Summary: **12 V, 7A Constant Current**
(Equivalent to 14A tapered charger in charging time)

- Automatic Cut-off and then true Float. Can be left connected indefinitely without harming the battery.
- UL & cUL (CSA) Listed (UL1012-outdoor CE)
- Universal Input (Range 90VAC~264VAC) Suitable to work in any part of the world.
- Increases battery life by de-sulfating the battery.
- Many advance features described in this spec.

Explanation of the Features:

The advance technology of the OEM Battery Chargers supplied by Soneil is fundamentally different from other battery chargers. The conventional linear battery charger is an electrical device whereas the 1214SR-IP55 is a nice sophisticated electronic device.

1. **Switch-Mode Technology:**

Most of the battery chargers use linear technology, which convert the 115 VAC to 12 VDC at 60 Hz. This requires a large transformer, which has the disadvantage of lower efficiency resulting in higher heat generation, larger size and weight.

SONEIL - CANADA

www.soneil.com

PATENT PENDING

PH: (215) 565-0392

FAX: (202) 565-0352

MODEL: 1214SR-IP
INPUT: 100-240VAC
50/60Hz
3ANX
DC OUTPUT: 12VDC/6000mA

DC OUTPUT
WHITE WIRE: +12V
BLACK WIRE: -12V
GREEN WIRE: HIGH VOLTAGE
LED INDICATOR
ORANGE FLASHING: NO
GREEN: CHARGED

CAUTION:
*Risk of electric shock
*Connect only to properly
certified outlets



MANUFACTURE DATE CODE
1214SR-IP/04/03/02/00/00
MADE IN CHINA

Soneil's Battery Charger transforms the 90VAC~264VAC into 12 VDC at 100,000 Hz (1667 times faster than conventional charger) which requires a much smaller transformer and this results in a unit of smaller size, low weight and improved efficiency.

The 1214SR-IP55 uses sophisticated electronic circuitry with microchips. All present day computers use switch-mode technology.

2. **International Safety Approvals & Listing:**

UL & cUL (CSA) listings in a single charger.
UL1012-outdoor CE

3. **Input Requirements:**

- a) 115-230VAC (Range 90VAC~264VAC). Universal AC voltage.
- b) 47 - 63 Hz

This means 1214SR-IP55 will operate satisfactorily in areas where the input voltage is between 90-264V AC.

4. **Output:**

7 Amps Constant Current @ 12 Volts DC
(Equivalent to 14 Amps tapered in charging time)

- a) Line Regulation @ Full Load 2%
- b) Load Regulation 3%

c) **Ripple Voltage:** Very low

The peak-to-peak ripple voltage into a resistive load is less than 200mV for the output voltage above 12 VDC.

5. Charging Cycle:

If the LED is ON (Orange or Green), it shows that AC power is ON.

The charging curve is attached. The explanation of the charging cycle is as following.

Stages	Condition	Mode*	Current	Voltage	LED Indication
Stage 1	Constant Current mode	CC mode	7A	5.0V to 14.7V	Orange
Stage 2	Constant Voltage mode	CV mode	Reduces from 7A***	Holds at 14.7V	Orange
Stage 3	Standby Voltage mode	Standby CV mode	Reduces to zero	Maintains 13.8V	Green
	Recharging mode	CC mode	7A	12.5V	Orange

* CC mode = Constant current charge

* CV mode = Constant voltage charge

*** See Stage 3 description below

Stage 1: Constant Current Mode (CC): LED Orange

The charger changes to constant current 7A. When the battery voltage reaches up to 14.7V, the charging stage changes from CC (Constant Current) to CV (Constant Voltage) mode.

Stage 2: Constant Voltage Mode (CV): LED Orange

The charger holds the battery at 14.7V and the current slowly reduces. When the current reaches at 0.5CC (CC = Constant Current), this point called the Switching Point. The Switching Point is one of the great feature of this battery charger that it can adjust the current automatically according to battery capacity. Other chargers are not capable to adjust the current automatically.

Stage 3: Standby Voltage Mode: LED Green

The charger maintains the battery voltage at 13.8V and current slowly reduces to zero. Charger can be left connected indefinitely without harming the battery.

Recharging: LED Orange

If the battery voltage drops down to 12.5V, the charger changes from any mode to Constant Current mode and restart charging. The charging cycle will go through Stage 1 to Stage 3.

Soneil charger can charge gel or sealed lead acid batteries without use of any switch.

6. **Two colors in one LED:**

LED shows the charging status. The LED ON shows presence of AC power. The bicolour LED shows Orange when charging and changes to Green when the battery is fully charged. The charger will continue to provide very small current to cover internal losses and will maintain the battery at full charge.

7. **Very low voltage start:** 0.5 Volts

Will charge very deeply discharged batteries. Many 12 volts chargers in the market will not charge batteries discharge below 8 volts.

8. **Protection:**

- a) **Reverse polarity protection** - provided
- b) **Short circuit protection** - provided
- c) **Over-Voltage Protection** - provided
- d) **Over current protection** - provided
- e) **AC Surge Protection** - provided
- f) **Soft start and stop:** Starts and stops gradually.

No sudden in-rush of current. This protects both the batteries and any other circuits connected to the charger.

9. **De-sulfation of battery:** The charger will remove loose sulfation and increase the battery life. (Hard sulfation cannot be reversed).

10. **No current drain:**

No (zero) current is taken from the battery when connected to battery but AC not plugged in. (Many other chargers in the market draw 30-40 mAmp which drains the battery.)

11. **Reliability:**a) **Mean Time between failures (MTBF):**

30,000 power-on-hours (POH) or greater. This translates into 10 years of everyday operation of 8 hours.

b) **Burn-in:** All chargers are burned in at an average DC load of 7 Amps.12. **Electromagnetic Interference (EMI):**

The charger will not generate excessive radiated or conducted emissions. No interference with TV, radio, computer or other equipment.

13. **Ground leakage current:**

The ground leakage current is 87 microAmp, which complies with the requirements.


14. **Size:** **Very Small** Length - 7.11" (180 mm)
Width - 4.5" (113 mm)
Height - 2.7" (69 mm)

Very Light Weight 2.2 lbs (1 Kg.)

ALLUMINIUM FINISH CASE


Ref: SPEC1214SR-IP55(Rev01).062510

CHARGING CURVE
MODEL 1214SR-IP55
SONEIL 12V/7A CHARGER
(7A CONSTANT CURRENT)

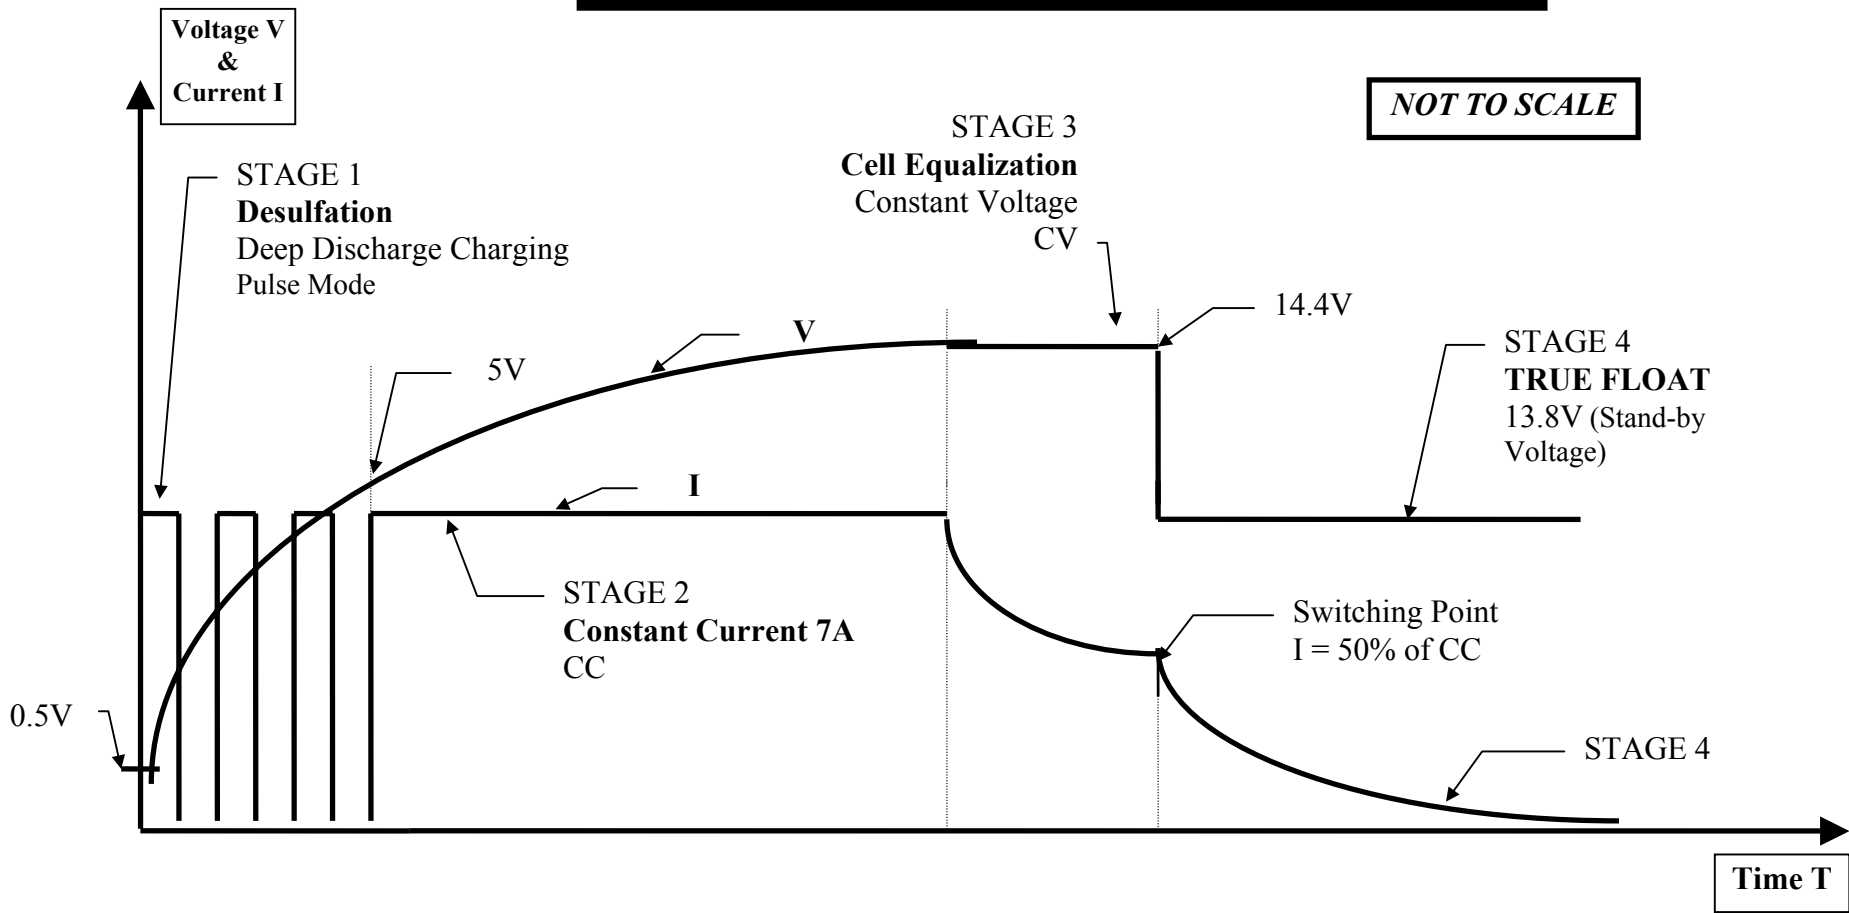

Ref: Curve1214SR-IP55.062510

B	DRWG NO.	REV		REVISIONS
		DESCRIPTION	DATE	APPROVED

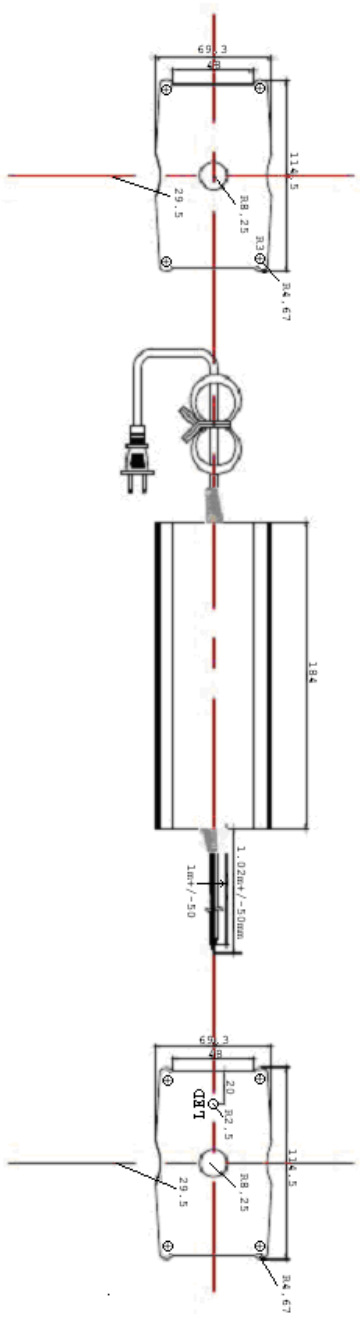

INPUT CORD: STOW2*18AWG 1.8M+/-100mm BLACK WITH UL 2PIN plug (without polarity)

OUTPUT CORD: SPT-2W 2*16AWG 1M+/-50mm red(+ve) and black(-ve)
with 1015 22AWG GREEN(Inhibit) length 1.02M+/-50mm

THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED	SIGNATURES	DATE	SCALE	TITLE
	DIMENSIONS ARE IN MM	DESIGN			1214SR-IP CASE
	TOLERANCES ON	CHECKED			
	1ST DECIMALS ±	ENGINE			
	2ND DECIMALS ±	ISSUED			
	ANGLES +				page 1
	FRACTIONS ±				

SONEIL INTERNATIONAL LIMITED

DRWG NO.